

**PENDANT FIXTURE  
INSTALLATION INSTRUCTIONS**

Please read carefully and save these instructions, as you may need them a later date.

**CAUTION**

Turn off the main power at the circuit breaker before installing the fixture, in order to prevent possible shock.

**GENERAL**

All electrical connections must be in accordance with local and National Electrical Code (N.E.C) standards. If you are unfamiliar with proper electrical wiring connections obtain the services of a qualified electrician. Remove the fixture and the mounting package from the box and make sure that no parts are missing by referencing the illustrations on the installation instructions.

**ASSEMBLY AND INSTALLATION**


1. Screw the LOOP in the fixtures.
2. Attach the Cross Bar to the Outlet Box by using 2pcs Mounting Screws upwards. Screw the NIPPLE with the WASHER and HEX NUT-1 to the CROSS BAR.

Make wire connections:

- Smooth wire (w/markings) from the light to black wire from power source.
- Ribbed wire (w/o marking) from the light to white wire from power source
- Attach the ground wire to the cross bar with a green ground screw. Carefully tuck wire back into the OUTLET BOX

3. Screw the TOP LOOP to the NIPPLE, Place the CANOPY against the OUTLET BOX, and secure it with the TOP NUT.
4. Screw CENTER PIPE with the HEX NUT-2 to the COUPLING, screw the Hex Nut-3, STATOR and another Hex Nut-3 on the Center Pipe.
5. Install bulbs. (Please do not exceed the maximum capacity which is recommended on the sockets).

6. Attach the GLASS (GLASS SOLD separately. Please adjust the Stator in a propriety position and have it fit the Glass) to the fixture. Attach the RUBBER WASHER, METAL WASHER to the NIPPLE and screw with the HEX NUT-4, attach the bottom CAP to the GLASS and lock with Final INSTALLATION IS NOW COMPLETED.

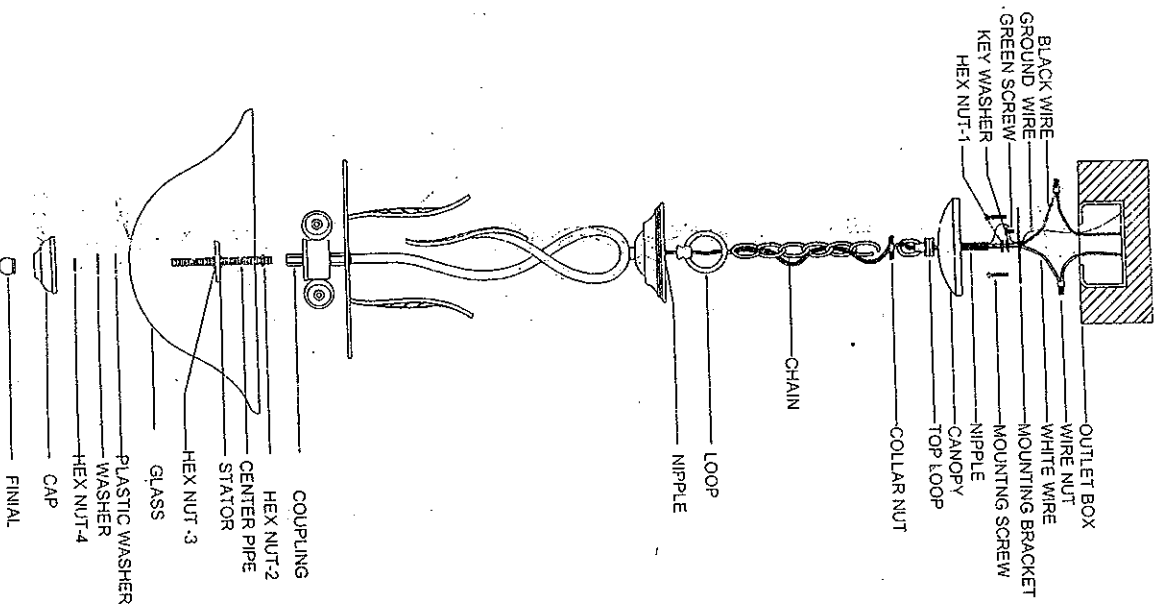

ITEM NO. 204BRZ & 214-B