

**CHANDELIER FIXTURE
INSTALLATION INSTRUCTIONS**

Please read carefully and save these instructions as you may need them a later date.

CAUTION


Turn off the main power at the circuit breaker before installing the fixture, in order to prevent possible shock.

GENERAL

All electrical connections must be in accordance with local and National Electrical Code (N.E.C) standards. If you are unfamiliar with proper electrical wiring connections obtain the services of a qualified electrician. Remove the fixture and the mounting package from the box and make sure that no parts are missing by referencing the illustrations on the installation instructions.

ASSEMBLY AND INSTALLATION

1. Attach the Cross Bar to the Outlet Box by using 2 pcs Mounting Screws upwards.
 2. Make wire connections:
 - Smooth wire (w/markings) from the light to black wire from power source.
 - Ribbed wire (w/o markings) from the light to white wire from power source.
 - Attach the ground wire to the cross bar with a green ground screw. Carefully tuck wire back into the OUTLET BOX
 3. Thread the Nipple into the Cross Bar with HEX NUT. Attached the CANOPY onto the NIPPLE, and secure it with the HEX NUT AND TOP BALL NUT.
 4. Screw the TOP FINIAL and BOTTOM FINIAL into Nipple. Attached the GLASS onto the SOCKET, then screw with the METAL RING and SOCKET RING.
 5. Hanging the HOOK onto LAMP FIXTURE.
- INSTALLATION IS NOW COMPLETED

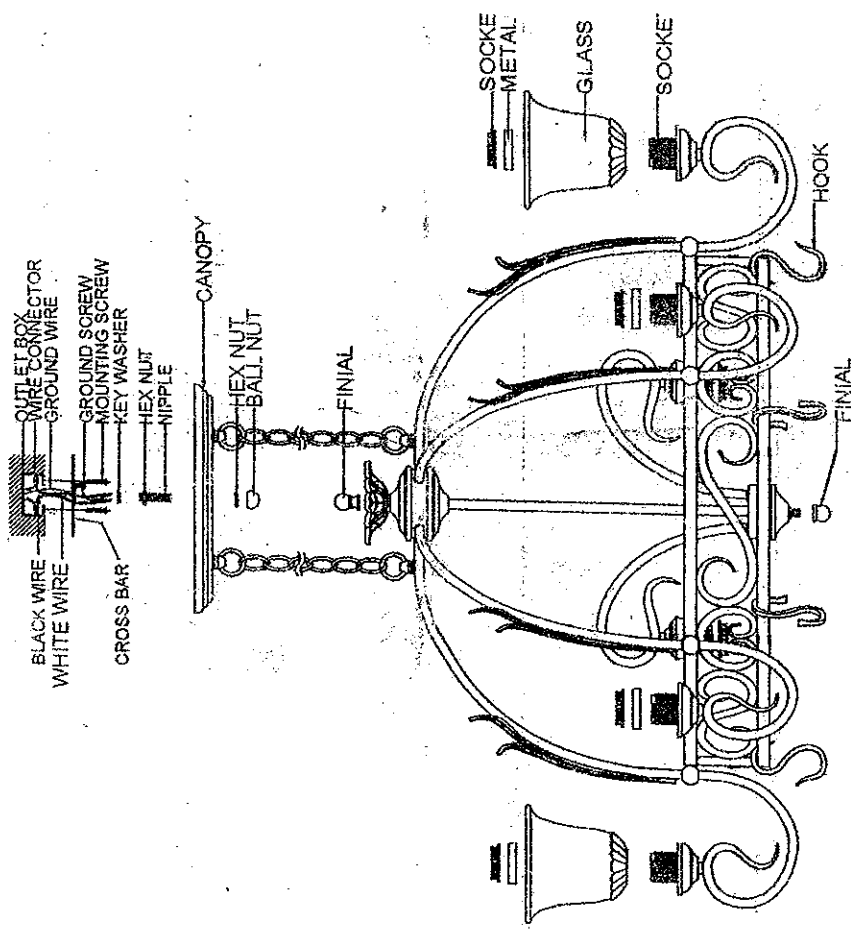

ITEM NO . 216 BRZ