


ASSEMBLY INSTRUCTION

Parts:

- A: Big Hexagon Screw
- B: Threaded Nipple
- C: Small Hexagon Nut
- D: Small Hexagon Nut
- E: Small Cup
- F: Glass Shade
- G: Half-round Cup
- H: Decorative Nut

Steps:

1. Remove lamp parts from package and place lamp on desk.
2. Screw Nipple (B) onto Big Hexagon Screw (A).
3. Secure the Big Hexagon Screw (A) with small Hexagon Nut (C).
4. Adjust Small Hexagon Nut (D) at a desired height. Then Insert Small Cup (E), Glass Shade (F) <not included> and Half-round Cup (G) as diagram stated.
5. Secure Half-round Cup (G) and Glass Shade (F) <not included> with Decorative Nut (H).
6. Follow the usual steps of chandelier assembly.

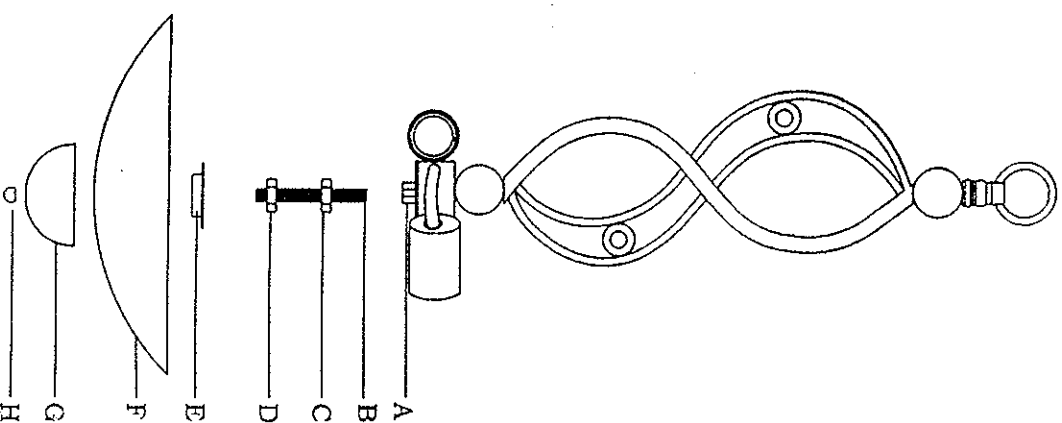

INSTALLATION

Disconnect power at main fuse box before installing fixture to prevent possible injury from electrical shock.

Remove all parts and parts packages from carton.

In some cases it may be necessary to attach loop(12) top of fixture assembly(13).

Guide fixture wire(11) through hole in loop, then screw loop onto threaded

pipe protruding from top of frame.

Find a fixed spot to secure the fuse(3).(not included)

Attach crossbar(5) to outlet box(17) with outlet box screws(4). Screw threaded

nipple(7) into crossbar(5) approximately 1/2".

Connect screw collar loop(9) onto threaded nipple(7). Pass canopy(6) over screw

collar loop(9). Approximately one-half of the screw collar loop exterior thread

should be exposed. Adjust as required. Remove canopy.Slip threaded ring

(8) onto chain-the canopy(6) onto chain. Attach other end link of chain to screw

collar loop(9).

Weave electrical wires and ground wire up chain, through screw collar loop(9)

through threaded nipple(7) and into outlet box(17).


Attach bare copper ground wire from outlet box and copper ground wire from

fixture under cupped washer(14) and secure with green ground screw(15) onto

crossbar(5).

Splice smooth round fixture wire(11) to black supply wire(16) and ribbed or flat

sided fixture wire(11) to white supply wire(1) using wire connectors(2).



CAUTION: Be certain no bare wire strands are exposed outside of wire connectors.

Raise canopy(6) to ceiling, hold in place and secure with threaded ring(8) onto screw collar loop(12).

PARTS LIST:

- 1 white supply wire
- 2 wire connectors
- 3 fuse (not included)
- 4 outlet box screws
- 5 crossbar
- 6 canopy
- 7 threaded nipple
- 8 threaded ring
- 9 collar loop
- 10 chain
- 11 fixture wire
- 12 loop
- 13 fixture assembly
- 14 cupped washer
- 15 green ground screw
- 16 black supply wire
- 17 outlet box

