# ASSEMBLY INSTRUCTION


#### Parts:

A: Loop B: Cover C: Nipple

D: Hickey

### Steps

- 1.Remove fixture from carton being carefully.
- 2.Screw the Nipple(C) through the cover (B)into the threaded section of the tubing(D) until tight.
- 3. Thread the Loop(A) into the exposed section of the Nipple(C) until tight.
- 4. Follow the usually steps of chandelier assembly.

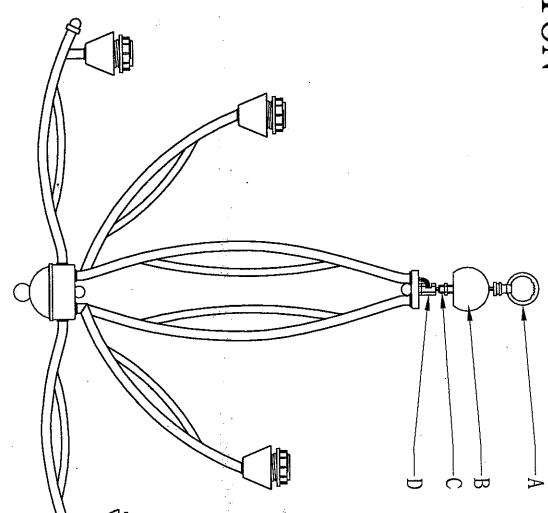

injury from electrical shock. Disconnect power at main fuse box before installing fixture to prevent possible

Remove all parts and parts packages from carton.

Guide fixture wire(10) through hole in loop, then screw loop onto threaded In some cases it may be necessary to attach loop(11) top of fixture assembly(12) pipe protruding from top of frame.

nipple(6) into crossbar(4) approximately  $1/2^{\circ}$ Attach crossbar(4) to outlet box(16) with outlet box screws(3). Screw threaded

(7) onto chain, the canopy(5) onto chain. Attach other end link of chain to screw should be exposed. Adjust as required. Remove canopy Slip threaded ring collar lopp(8). Approximately one-half of the screw collar loop exterior thread Connect screw collar loop(8) onto threaded nipple(6). Pass canopy(5) over screw

collar loop(8) Weave electrical wires and ground wire up chain, through screw collar loop(8)

fixture under cupped washer(13) and secure with green ground screw(14) onto Attach bare copper ground wire from outlet box and copper ground wire from through threaded nipple(6) and into outlet box(16).

sided fixture wire(10) to white supply wire(1) using wire connectors(2). Splice smooth round fixture wire(10) to black supply wire(15) and ribbed or flat



CAUTION: Be certain no bare wire strands are exposed outside of wire connectors.

screw collar loop(11) Raise canopy(5) to ceiling, hold in place and secure with threaded ring(7) onto

## PARTS LIST:

- white supply wire
- 2 wire connectors
- 3 outlet box screws
- 4 crossbar
- canopy
- threaded nipple
- threaded ring
- collar loop
- 9 chain
- 11 loop 10 fixture wire
- 12 fixture assembly
- 14 green ground screw 13 cupped washer
- 15 black supply wire

16 outlet box

