

## CHANDELIER FIXTURE INSTALLATION INSTRUCTIONS

Please read carefully and save these instructions, as you may need them a later date.

### CAUTION

Turn off the main power at the circuit breaker before installing the fixture, in order to prevent possible shock.

### GENERAL

All electrical connections must be in accordance with local and National Electrical Code (N.E.C) standards. If you are unfamiliar with proper electrical wiring connections obtain the services of a qualified electrician. Remove the fixture and the mounting package from the box and make sure that no parts are missing by referencing the illustrations on the installation instructions.

### CHANDELIER ASSEMBLY AND INSTALLATION


- 1, Thread the Decorative tube onto the nipple(1).
- 2, Screw the LOOP to the fixtures.
- 3, Attach the Cross Bar to the Outlet Box by using 2pcs Mounting Screws upwards. Screw the NIPPLE with the WASHER and HEX NUT-1 to the CROSS BAR.

Make wire connections:

- Smooth wire (w/markings) from the light to black wire from power source.
  - Ribbed wire (w/o markings) from the light to white wire from power source
  - Attach the ground wire to the cross bar with a green ground screw.
- Carefully tuck wire back into the OUTLET BOX
- 4, Screw the TOP LOOP to the NIPPLE, Place the CANOPY against the OUTLET BOX, and secure it with the TOP NUT.

- 5, Install bulbs. (Please do not exceed the maximum capacity which is recommended on the sockets).

**INSTALLATION IS NOW COMPLETED.**

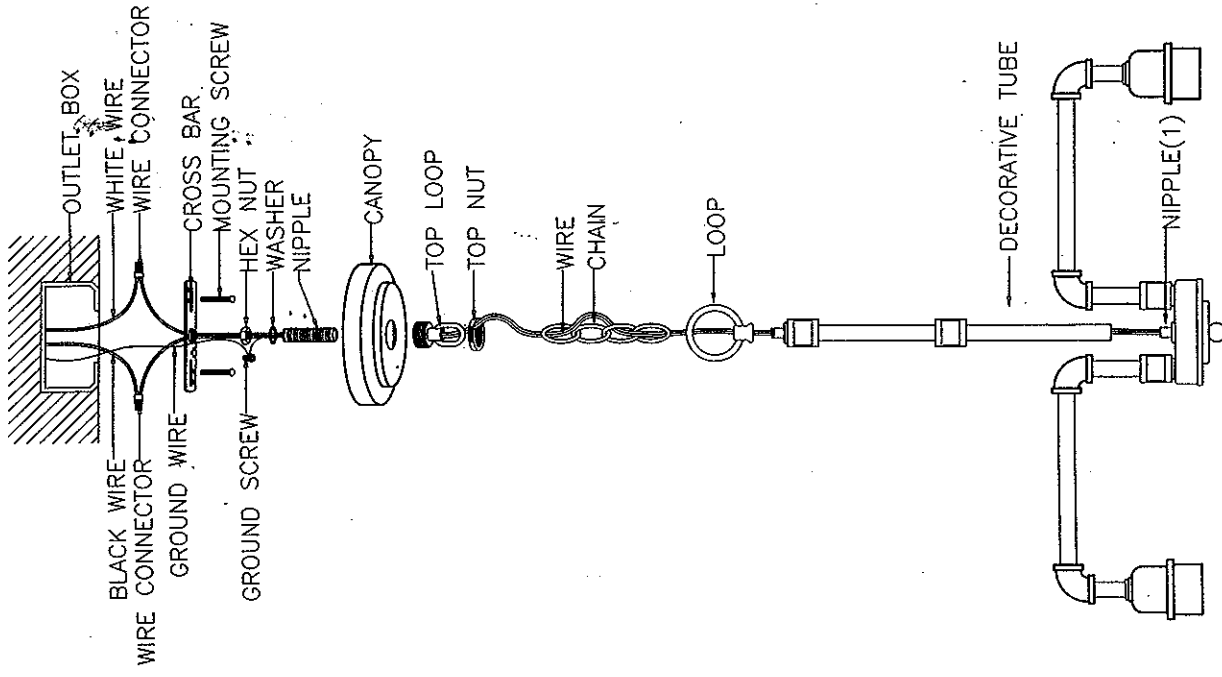

**PENDANT FIXTURE**  
**INSTALLATION INSTRUCTIONS**

Please read carefully and save these instructions, as you may need them a later date.

**CAUTION**

Turn off the main power at the circuit breaker before installing the fixture, in order to prevent possible shock.

**GENERAL**

All electrical connections must be in accordance with local and National Electrical Code (N.E.C) standards. If you are unfamiliar with proper electrical wiring connections obtain the services of a qualified electrician. Remove the fixture and the mounting package from the box and make sure that no parts are missing by referencing the illustrations on the installation instructions.

**PENDANT ASSEMBLY AND INSTALLATION**

- Thread the Decorative tube onto the nipple(1).
- Connect the Pipe (1),(2),(3) together with the fixture.
- Attach two Screws-1 outward through the CROSS BAR, spin the Hex nut to the Screw-1, then attach the CROSS BAR( to the OUTLET BOX by the two MOUNTING SCREWS .
  - Make wire connections:
    - Ribbed wire(w/o marking) from light to WHITE WIRE from power source.
    - Smooth wire(w/ marking) from light to BLACK WIRE from power source.
    - Loop the GROUND WIRE to CROSS BAR with a GREEN SCREW .
- Place the CANOPY against the OUTLET BOX by screwing the Hex nut and Ball Nut
- Install bulbs.(Please do not exceed the maximum capacity which is recommended on the sockets).

INSTALLATION IS NOW COMPLETED.

