

PENDANT FIXTURE INSTALLATION INSTRUCTIONS

Please read carefully and save these instructions, as you may need them a later date.

CAUTION

Turn off the main power at the circuit breaker before installing the fixture, in order to prevent possible shock.

GENERAL

All electrical connections must be in accordance with local and National Electrical Code(N.E.C) standards.If you are unfamiliar with proper electrical wiring connections obtain the services of a qualified electrician.


Remove the fixture and the mounting package from the box and make sure that no parts are missing by referencing the illustrations on the installation instructions.

ASSEMBLY AND INSTALLATION

- 1, Aim at the Arm and use the **STEM NUT** screw tightly. Then Screw the Loop to the Fixture.
- 2, Screw the Center tube onto the Nipple, aim at the bottom of arm and use the Stem nut screw tightly.
- 3, Attach the Cross Bar to the Outlet Box by using 2pcs Mounting Screws upwards. Screw the **NIPPLE** with the **WASHER** and **HEX NUT** to the **CROSS BAR**.

Make wire connections:

- Smooth wire (w/markings) from the light to black wire from power source.
 - Ribbed wire (w/o marking) from the light to white wire from power source
 - Attach the ground wire to the cross bar with a green ground screw.
- Carefully tuck wire back into the **OUTLET BOX**
- 3, Screw the **TOP LOOP** to the **NIPPLE**,Place the **CANOPY** against the **OUTLET BOX**, and secure it with the **TOP NUT**.
 - 4.Screw the Treaded tube onto the Coupling, then put the Glass onto it.
 5. Insert the Plastic Washer, Metal washer and use the Hex nut screw tightly. Then put the Cap and use Finial Screw it.
 - 6, Install bulbs.(Please do not exceed the maximum capacity which is recommended on the sockets).

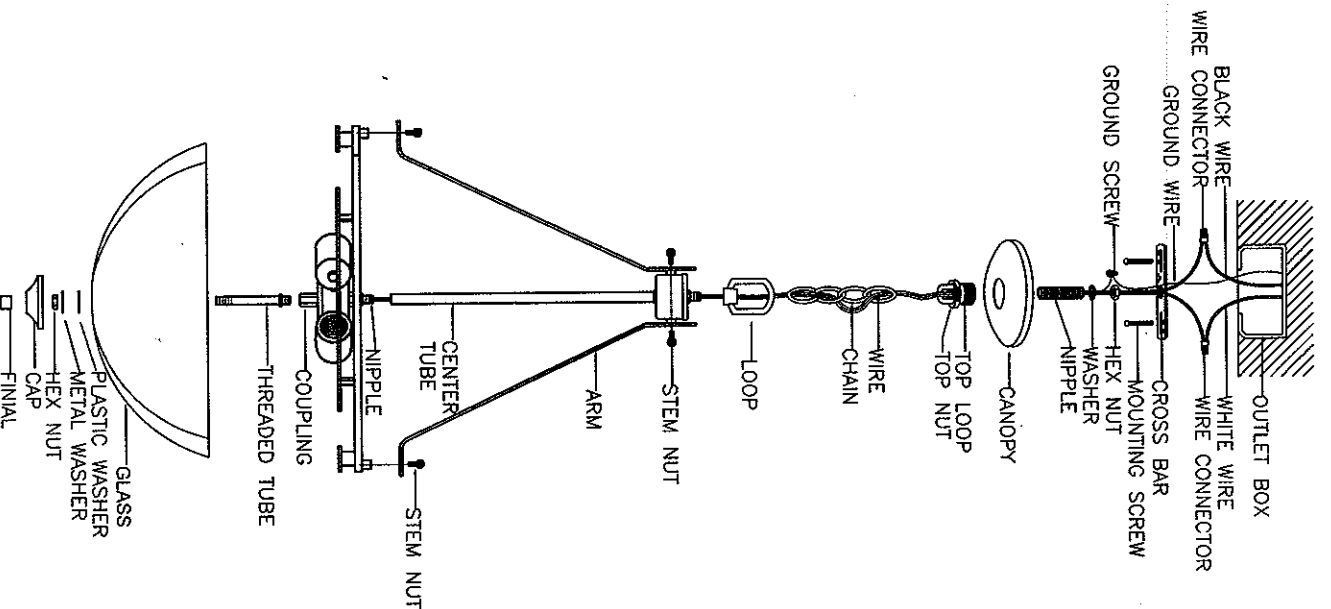

ITEM NO:322-DG-463, 322-DG-46

322-AS-464

INSTALLATION IS NOW COMPLETED.