

## CHANDELLIER FIXTURE INSTALLATION INSTRUCTIONS

Please read carefully and save these instructions, as you may need them a later date.

### CAUTION

Turn off the main power at the circuit breaker before installing the fixture, in order to prevent possible shock.

### GENERAL

All electrical connections must be in accordance with local and National Electrical Code (N.E.C.) standards. If you are unfamiliar with proper electrical wiring connections obtain the services of a qualified electrician.

Remove the fixture and the mounting package from the box and make sure that no parts are missing by referencing the illustrations on the installation instructions.

### ASSEMBLY AND INSTALLATION

1. Aim at the arm and use the **STEM NUT** screw tightly. Then Screw the **Loop** to the **Fixture**.

2. Attach the **Cross Bar** to the **Outlet Box** by using 2pcs Mounting Screws upwards. Screw the **NIPPLE** with the **WASHER** and **HEX NUT** to the **CROSS BAR**.

Make wire connections:


--Smooth wire (w/w/ marking) from the light to black wire from power source.  
--Ribbed wire (w/o marking) from the light to white wire from power source  
--Attach the ground wire to the cross bar with a green ground screw.

Carefully tuck wire back into the **OUTLET BOX**

3. Screw the **TOP LOOP** to the **NIPPLE**, Place the **CANOPY** against the **OUTLET BOX**, and secure it with the **TOP NUT**.

4. Attach the **GLASS** onto the **Socket** and secure with the **Socket Ring**

5. Install bulbs. (Please do not exceed the maximum capacity which is recommended on the sockets).

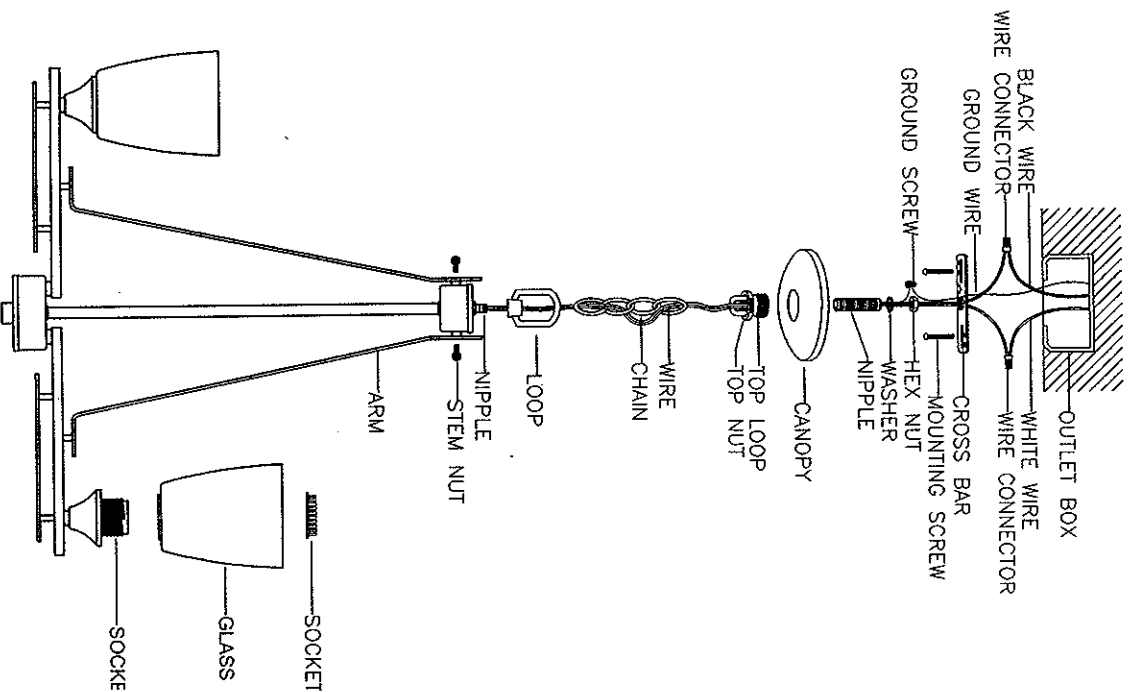

ITEM NO: 323-DG-460, 323-DG-461, 323-AS-4  
325-DG-460, 325-DG-461, 325-AS-4