


INSTALLATION INSTRUCTIONS

Parts:

- A: Mounting plate
- B: Wire connector
- C: Sconce mounting screw
- D: Threaded nipple
- E: Canopy
- F: Finial
- G: Socket
- H: Glass shade (not included)
- I: Socket ring

Steps:

1. SHUT OFF MAIN ELECTRICAL SUPPLY FROM THE MAIN FUSE BOX / CIRCUIT BREAKER.
2. Gently pull the wiring out of the wall outlet box and allow the wires to hang. Pull the wires through the center hole in the mounting plate (A).
3. Attach the mounting plate to the outlet box using the sconce mounting screws (C).
4. Connect the neutral fixture wire (the ribbed one) to the neutral (white) outlet wire. Fasten together with a wire connector (B). Repeat this procedure with the hot wire (the smooth one). Always make sure that no wire strands are left outside of connectors. Then twist the fixture's ground wire and the outlet box's ground wire together by the wire connector.
5. Attach the Canopy (E) to the threaded nipple (D) Secure with finial (G).
6. Place glass shade (H) onto the socket (G) and secure with socket ring (I).

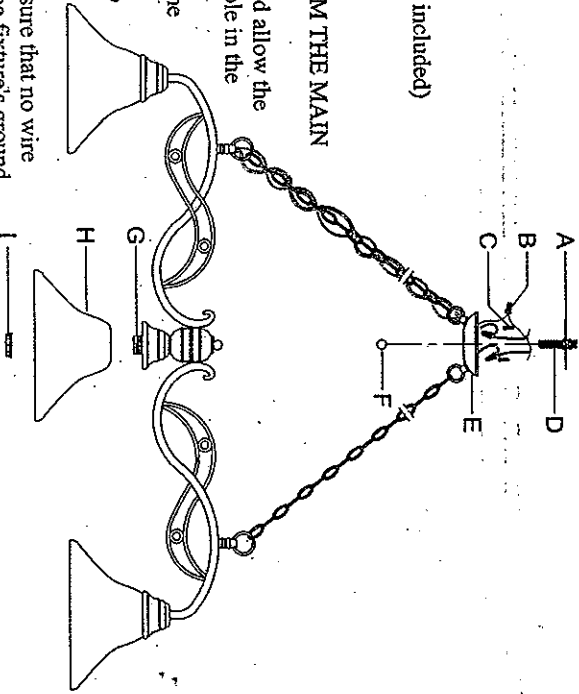

7. MUST BE HUNG AT LEAST 12" BELOW THE CEILING