

**BILLIARD FIXTURE
INSTALLATION INSTRUCTIONS**

please read carefully and save these instructions, as you may need them a later date.

CAUTION

Turn off the main power at the circuit breaker before installing the fixture, in order to prevent possible shock.

GENERAL



All electrical connections must be in accordance with local and National Electrical Code (N.E.C.) standards. If you are unfamiliar with proper electrical wiring connections obtain the services of a qualified electrician.

Remove the fixture and the mounting package from the box and make sure that no parts are missing by referencing the illustrations in the installation instructions.

ASSEMBLY AND INSTALLATION

1. Thread the Nipple with the Key Washer and Hex Nut the Cross bar, then attach the Cross Bar to the Outlet Box by using 2PCS Mounting Screws
2. Make wire connections:
 - Smooth wire (w/markings) from the light to black wire from power source
 - Ribbed wire (w/o markings) from the light to black wire from power source
 - Attach the ground wire to the cross bar with a green ground screw. Carefully tuck wire back into the OUTLET BOX
3. Place the Canopy against the Outlet box, secure with the Finial.
4. Attach the GLASS (GLASS SOLD SEPARATELY) to the Socket and screw with the Socket Ring, Put the finial onto the fixture.

ITEM NO.893-BRZ/DG/BN

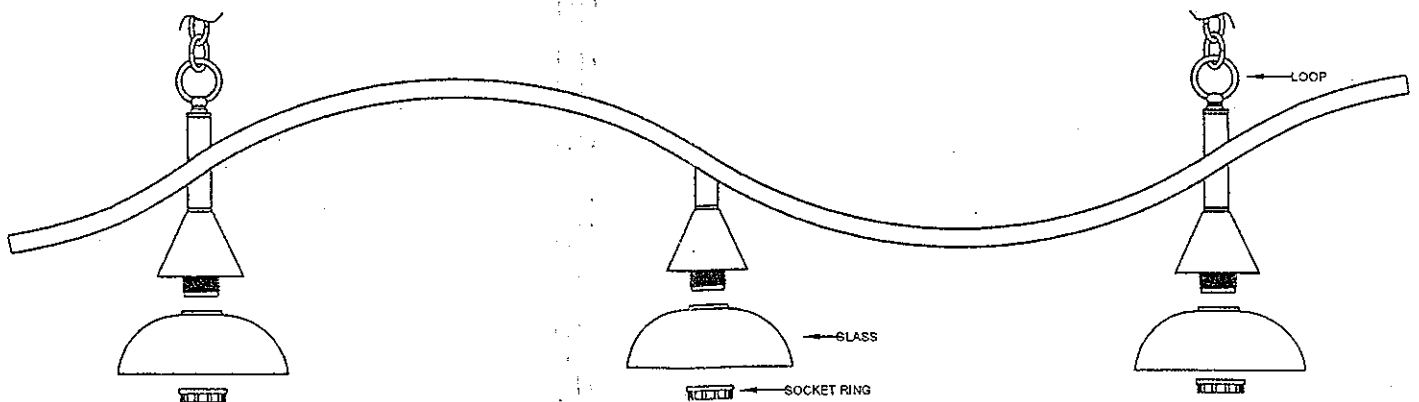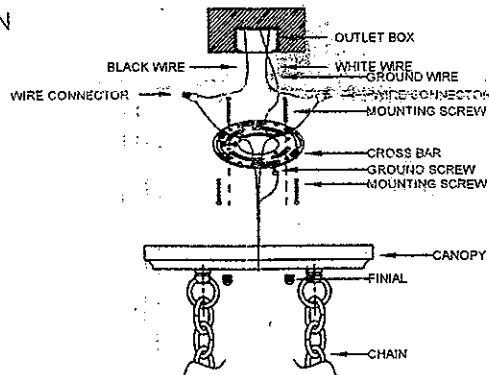

*** MUST BE HUNG AT LEAST 12 INCHES below the ceiling**