CHANDELIER FIXTURE INSTALLATION INSTRUCTIONS

Please read carefully and save these instructions, as you may need them a later date.

CAUTION

Turn off the main power at the circuit breaker before installing the fixture, in order to prevent possible shock.

GENERAL


All electrical connections must be in accordance with local and National Electrical Code(N. E. C) standards. If you are unfamiliar with proper electrical wiring connections obtain the services of a qualified electrician. Remove the fixture and the mounting package from the box and make sure that no parts are missing by referencing the illustrations on the installation instructions.

ASSEMBLY AND INSTALLATION

- 1. Determine the preferred hanging height and adjust to the required Pipes.
- 2. Feed the wires through the Pipes and connect them together.
- 3. Thread the Swivels into the Pipe-1.
- 4. Insert the nipples of Swivels into holes in Canopy, then place the Metal washer, the Support cable and the Lock washers over the nipples, then secure with the Butterfly nuts.
- 5. Thread the Mounting screws into the matching holes of Circular strap, and tighten with the Hex nuts. Secure the Circular strap to the Outlet box with the Outlet box screws.
- 6. Attach the Hook on the end of the Support cable to the Circular strap.
- 7. Make wire connections with wire connector:
- --- The Black wire from fixture to Black wire from power source.
- ---The White wire from fixture to White wire from power source.

---Attach the ground wire and house ground wire to the mounting bar with the green ground screw. Carefully tuck wire back into the outlet box.

- 8. Place the fixture Canopy over the two Mounting screws so they protrude through the holes in the Canopy. Thread the Ball nuts onto the Mounting screws and continue turning until the fixture is snug against the Ceiling.
- 9. Attach the Glass shade (Not included, sold separately) onto the Socket, tightened by screwing Socket ring.
- 10. Install light bulbs (not supplied). (Please do not exceed the maximum capacity which is recommended on the socket).

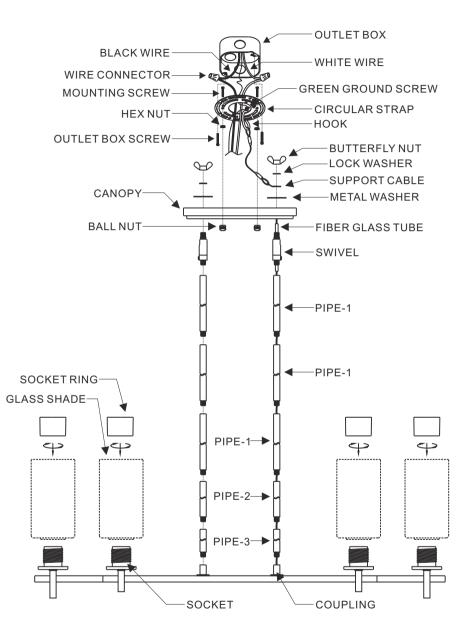

ITEM NO:2326