

**PENDANT FIXTURE  
INSTALLATION INSTRUCTIONS**

Please read carefully and save these instructions, as you may need them a later date.

**CAUTION**

Turn off the main power at the circuit breaker before installing the fixture, in order to prevent possible shock.

**GENERAL**

All electrical connections must be in accordance with local and National Electrical Code(N.E.C) standards. If you are unfamiliar with proper electrical wiring connections obtain the services of a qualified electrician.


Remove the fixture and the mounting package from the box and make sure that no parts are missing by referencing the illustrations on the installation instructions.

**ASSEMBLY AND INSTALLATION**

- 1, Screw the Loop to the Fixture.
- 2, Attach the Cross Bar to the Outlet Box by using 2pcs Mounting Screws upwards. Screw the NIPPLE with the WASHER and HEX NUT to the CROSS BAR.

Make wire connections:

- Smooth wire (w/markings) from the light to black wire from power source.
- Ribbed wire (w/o marking) from the light to white wire from power source
- Attach the ground wire to the cross bar with a green ground screw.
- Carefully tuck wire back into the OUTLET BOX
- 3, Screw the TOP LOOP to the NIPPLE. Place the CANOPY against the OUTLET BOX, and secure it with the TOP NUT.
- 4. Put the GLASS onto the socket, then use the METAL SOCKET RING screw tightly.
- 5, Install bulbs. (Please do not exceed the maximum capacity which is recommended on the sockets).

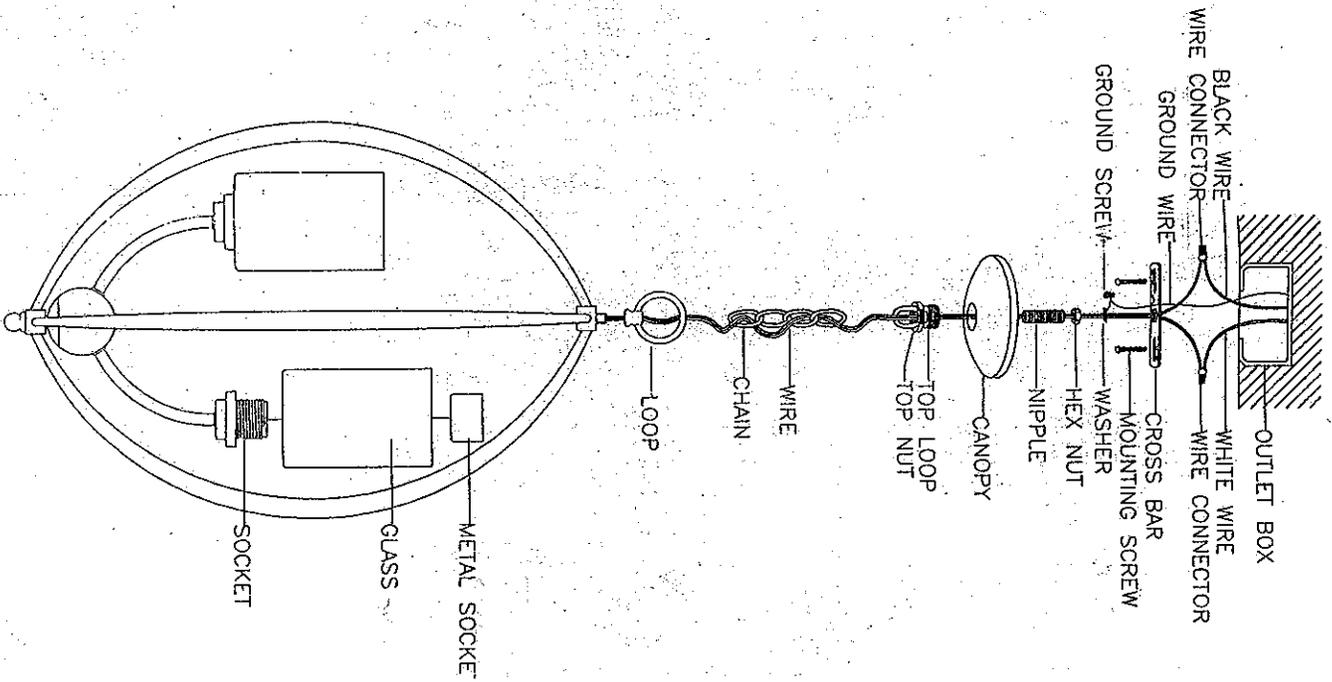

INSTALLATION IS NOW COMPLETED.

ITEM NO: 2414-BN/ 2414-DG