

**BILLARD FIXTURE
INSTALLATION INSTRUCTIONS**

Please read carefully and save these instructions, as you may need them a later date.

CAUTION

Turn off the main power at the circuit breaker before installing the fixture, in order to prevent possible shock.


GENERAL

All electrical connections must be in accordance with local and National Electrical Code (N.E.C) standards. If you are unfamiliar with proper electrical wiring connections obtain the services of a qualified electrician. Remove the fixture and the mounting package from the box and make sure that no parts are missing by referencing the illustrations on the installation instructions.

ASSEMBLY AND INSTALLATION

- Connect the Pipe (1),(2),(3),(4), (5) ,(6) together with the fixture. Then screw with the Swivel.
- Then attach the CROSS BAR to the OUTLET BOX by the two MOUNTING SCREWS .
- Screw the butterfly nut, key washer, Metal Washer and from the Swivel.
- Make wire connections:
 - Twist together the white wire from the fixture with the white wire from outlet box. Cover with wire connector
 - Twist together the black wire from the fixture with the black wire from outlet box. Cover with wire connector
 - Loop the GROUND WIRE to CROSS BAR with a GREEN SCREW.
- Place the CANOPY against the OUTLET BOX by screwing the Ball Nut
- Attach the SHADE(not included) onto the SOCKET , screw SOCKET RING tightly .
- Install bulbs.(Please do not exceed the maximum capacity which is recommended on the sockets).

INSTALLATION IS NOW COMPLETED.

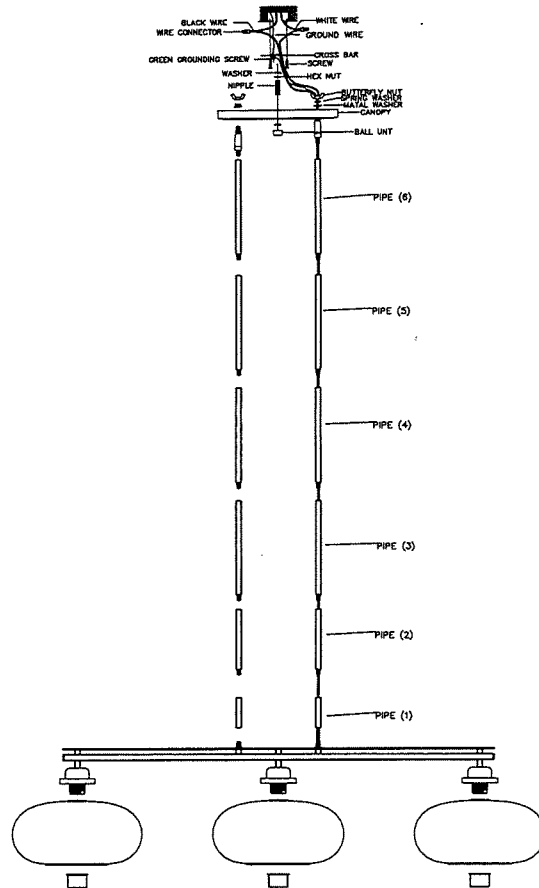

ITEM NO. 2636-BN, 2636-MB, 2633-BN, 2633-MB