

## PENDANT FIXTURE INSTALLATION INSTRUCTIONS

Please read carefully and save these instructions, as you may need them a later date.

### CAUTION


Turn off the main power at the circuit breaker before installing the fixture, in order to prevent possible shock.

### GENERAL

All electrical connections must be in accordance with local and National Electrical Code (N.E.C) standards. If you are unfamiliar with proper electrical wiring connections obtain the services of a qualified electrician. Remove the fixture and the mounting package from the box and make sure that no parts are missing by referencing the illustrations on the installation instructions.

### ASSEMBLY AND INSTALLATION

- Connect the Pipe (1),(2),(3),(4),(5) together with the fixture. Then screw with the Swivel.
- Attach two Screws-1 outward through the CROSS BAR, spin the Hex nut to the Screw-1, then attach the CROSS BAR to the OUTLET BOX by the two MOUNTING SCREWS.
- Make wire connections:
  - Ribbed wire(w/o marking) from light to WHITE WIRE from power source.
  - Smooth wire(w/ marking) from light to BLACK WIRE from power source.
  - Loop the GROUND WIRE to CROSS BAR with a GREEN SCREW.
- Place the CANOPY against the OUTLET BOX, tightened by screwing Ball Nut.
- Attach the GLASS SHADE(glass sold separately) and metal ring onto the SOCKET, tightened by screwing SOCKET RING.

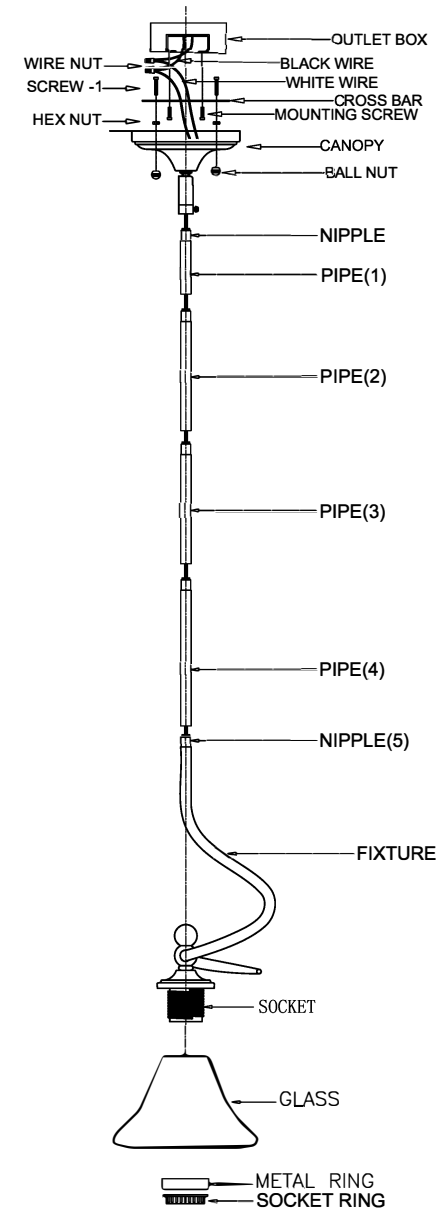

ITEM NO.: 900-DG, 900-BN, 900-MB