

## **PENDANT FIXTURE** **INSTALLATION INSTRUCTIONS**

Please read carefully and save these instructions, as you may need them a later date.

### **CAUTION**

Turn off the main power at the circuit breaker before installing the fixture, in order to prevent possible shock.


### **GENERAL**

All electrical connections must be in accordance with local and National Electrical Code(N.E.C) standards. If you are unfamiliar with proper electrical wiring connections obtain the services of a qualified electrician.

Remove the fixture and the mounting package from the box and make sure that no parts are missing by referencing the illustrations on the installation instructions.

### **ASSEMBLY AND INSTALLATION**

- Connect the Pipe (1),(2),(3),(4),(5) together with the fixture. Then screw with the Swivel.
- Attach two Screws-1 outward through the CROSS BAR, spin the Hex nut to the Screw-1, then attach the CROSS BAR( to the OUTLET BOX by the two MOUNTING SCREWS .
- Make wire connections:
  - Ribbed wire(w/o marking) from light to WHITE WIRE from power source.
  - Smooth wire(w/ marking) from light to BLACK WIRE from power source.
  - Loop the GROUND WIRE to CROSS BAR with a GREEN SCREW/ .
- Place the CANOPY against the OUTLET BOX, tightened by screwing Ball Nut .
- Attach the GLASS SHADE(glass sold separately) and metal ring onto the SOCKET , tightened by screwing SOCKET RING.

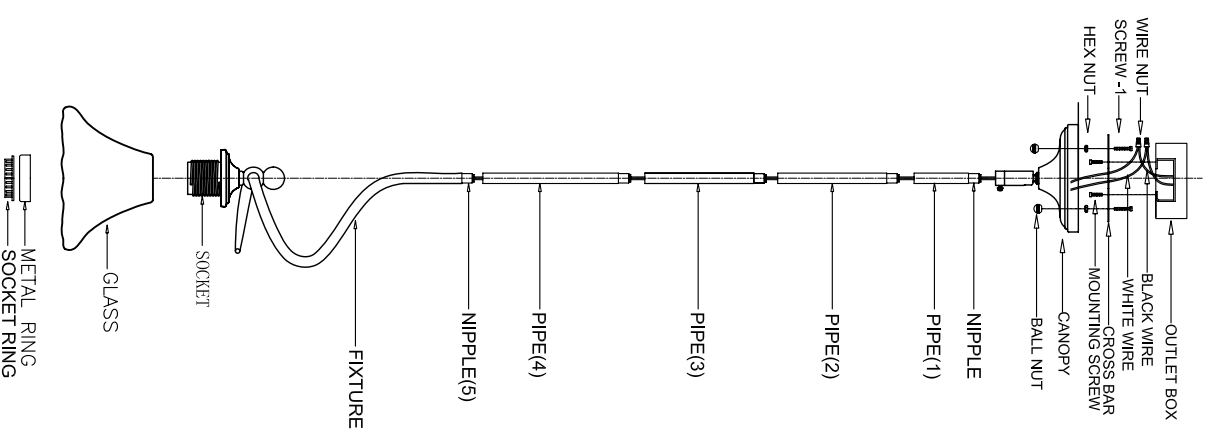

ITEM NO.: 901-DG, 901-BN, 901-MB